

PRQ-500 SERIES


DESCRIPTION :

Just like the PRQ-400 series, the mercury lighting relays for Streets lighting series PRQ-500 are perfectly appropriate for the applications where several sources of light must be controlled starting from a simple photocell. Moreover, they offer a greater capacity and a life expectancy thanks to the new chemical composition of mercury contained in the cell's contact.

SPECIFICATIONS:

Fuse on the control system ;	Easy access to the circuit breaker or fuse;
Temperature of operation: -31 TO 130 Degree F;	Lighting protection ;
Available for 24 / 208 / 277 / 480 Volts ;	Coded wire;
Quiet operations;	No bouncing of contact ;
Single Pole;	The contacts do not stick ;
Resist severe climatic conditions ;	Available contact s N.O and N.C;
Easy slide door for rapid access	

ASPECT...

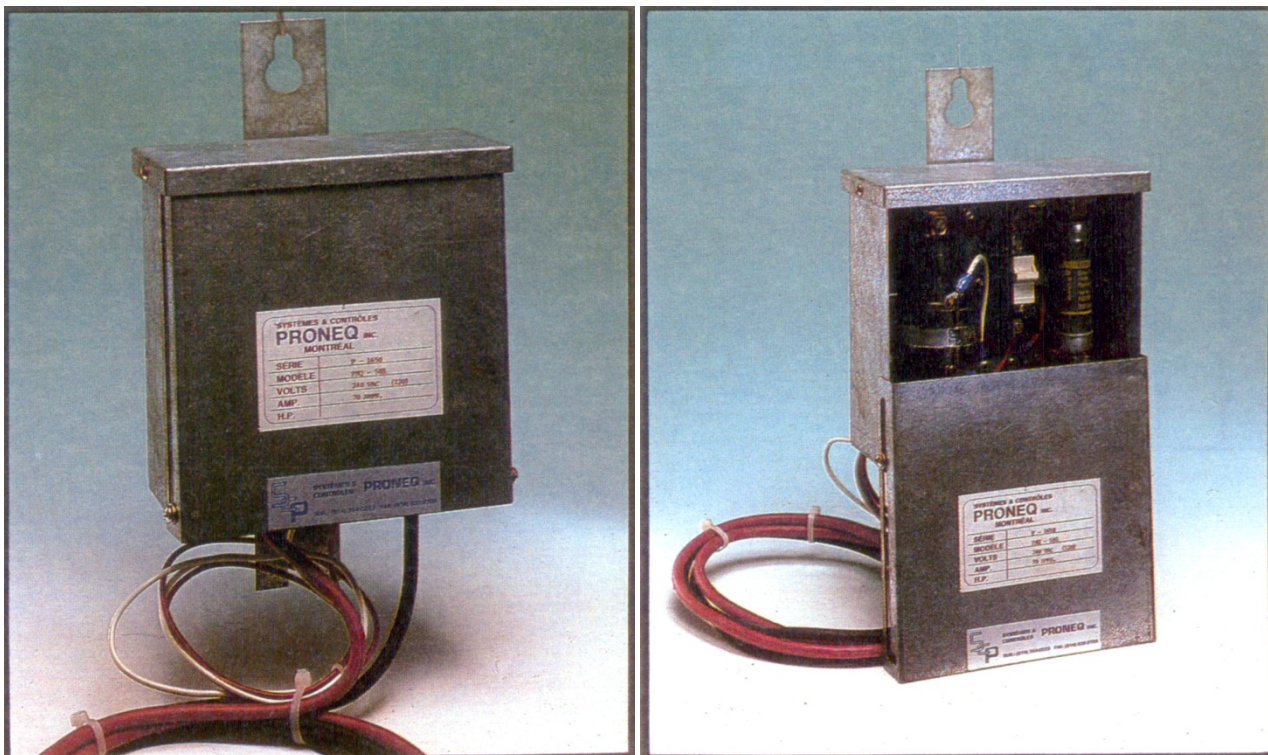

1420-C, De Coulomb St Boucherville Quebec J4B 7K2

Phone : (450) 449-2524 Fax : (450) 449-2625

www.proneq.com


The Excellence in Control and Lighting Panels

ELECTRICAL SPECIFICATION, PRQ-500 SERIES

COIL				
MODEL	VOLTAGE	CURRENT	POWER	
PRQ-501	120V 50/60HZ	225 ma	12 W	
PRQ-502	120V 50/60HZ	150 ma	8 W	
PRQ-503	120V 50/60HZ	225 ma	12 W	
PRQ-504	120V 50/60HZ	150 ma	8 W	

CONTACT (250V)				
MODEL	NORMAL	TYPE	MAX CURRENT	WIRE NO.
PRQ-501	Close	1 Pole	70 A	6
PRQ-502	Open	1 Pole	70 A	6
PRQ-503	Close	1 Pole	90 A	6
PRQ-504	Open	1 Pole	90 A	6

DIMENSIONS

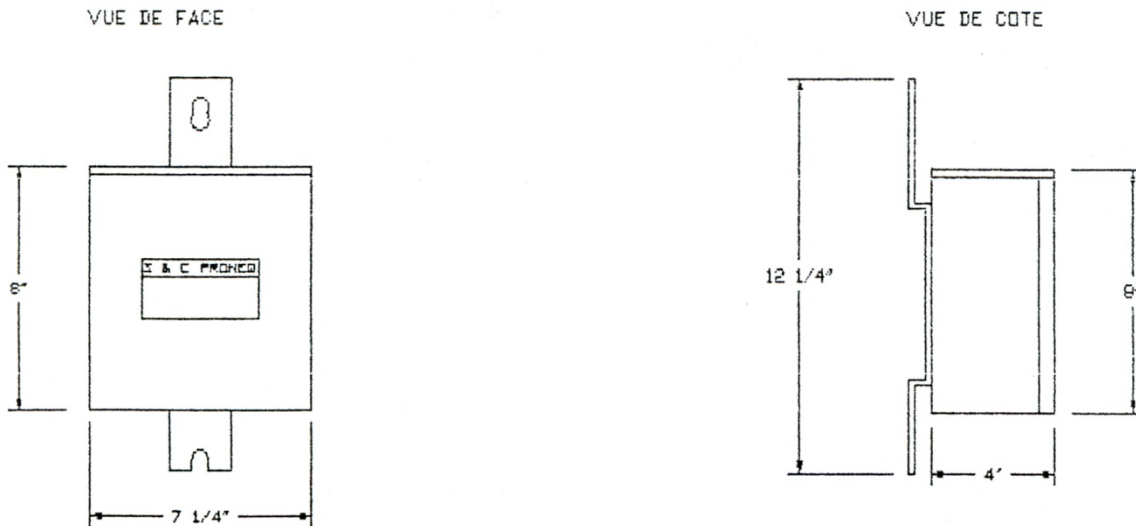

1420-C, De Coulomb St Boucherville Quebec J4B 7K2

Phone : (450) 449-2524 Fax : (450) 449-2625

www.proneq.com

The Excellence in Control and Lighting Panels